
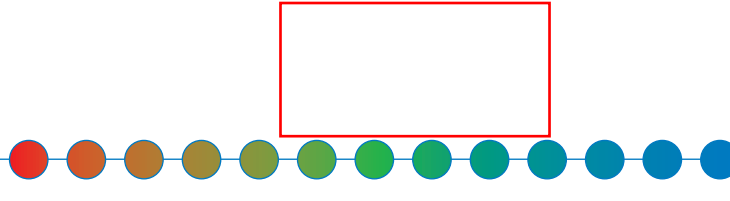


DC Blower



Bearing type: ◎=Ball "B" ※=Sleeve "S" ○=1B1S "B(S)" ●=Hypro bearing "X"

PHOTO	Frame size (mm)	Model No.	Bearing Type B S B(S) X	Voltage (VDC)	Current (A)	Power (W)	Speed (rpm)	Maximum AirFlow (CMM)	(CFM)	Maximum Pressure (InAq)	(mmAq)	Noise (dB/A)	Weight (g)
	50x50x09	AB0505LB-RB1	◎ ※ ●	5	0.12	0.60	4000	0.059	2.08	0.158	3.94	31.7	31.5
		AB0505MB-RB1	◎ ※ ●	5	0.17	0.85	5000	0.085	3.00	0.291	7.28	30.5	
	50x50x20	AB5012HB-C01	◎ ※ ●	12	0.21	2.52	6000	0.159	5.65	0.747	18.68	36.7	28
		AB5012MB-C01	◎ ※ ●	12	0.12	1.44	5000	0.130	4.60	0.491	12.27	31.3	
		AB5012LB-C01	◎ ※ ●	12	0.09	1.08	4000	0.104	3.70	0.240	6.00	24.5	
	70x70x12	AB7012HB-E01	◎	12	0.18	2.16	3800	0.183	6.48	0.419	10.48	34.0	35
		AB7012LB-E01	◎	12	0.10	1.20	2700	0.117	4.16	0.151	3.78	20.5	
	75x75x30	AD7512LB	◎ ※ ●	12	0.11	1.32	2200	0.184	6.50	0.151	3.77	29.0	100
		AD7512MB	◎ ※ ●	12	0.15	1.80	2600	0.220	7.78	0.234	5.84	34.9	
		AD7512HB	◎ ※ ●	12	0.24	2.88	3000	0.258	9.11	0.330	8.24	38.5	
		AD7512UB	◎ ※ ●	12	0.52	6.24	4200	0.369	13.05	0.723	18.07	44.7	
		AD7524LB	◎ ※ ●	24	0.08	1.92	2200	0.184	6.50	0.151	3.77	29.0	
		AD7524MB	◎ ※ ●	24	0.14	3.36	2600	0.220	7.78	0.234	5.84	34.9	
		AD7524HB	◎ ※ ●	24	0.16	3.84	3000	0.258	9.11	0.330	8.24	38.5	
		AD7524UB	◎ ※ ●	24	0.27	6.48	4200	0.369	13.05	0.723	18.07	44.7	
	94x94x33	AB0912HB-Z01	◎	12	1.10	13.20	4000	0.614	33.10	0.909	29.21	54.2	140
		AB0912MB-Z01	◎	12	0.90	10.80	3600	0.892	31.40	1.020	25.90	51.5	
		AB0912LB-Z01	◎	12	0.57	6.84	3200	0.747	26.30	0.751	19.07	47.8	
		AB0912DB-Z01	◎	12	0.41	4.92	2800	0.614	21.80	0.565	14.35	46.6	
	120x120x32	AB1212DB-Y01	◎ ※ ●	12	0.30	3.60	1800	0.619	21.97	0.434	10.85	46.6	276
		AB1212LB-Y01	◎ ※ ●	12	0.45	5.40	2100	0.718	25.48	0.659	16.47	48.0	
		AB1212MB-Y01	◎ ※ ●	12	0.56	6.72	2300	0.791	28.09	0.829	20.72	49.0	
		AB1212HB-Y01	◎ ※ ●	12	0.89	10.68	2600	0.881	31.28	0.916	22.90	55.0	
		AB1212UB-Y01	◎ ※ ●	12	1.10	13.20	2800	0.940	33.40	1.148	28.70	53.3	
		AB1212XB-Y01	◎	12	1.40	16.80	3100	1.070	38.00	1.412	35.30	57.0	
		AB1224DB-Y01	◎ ※ ●	24	0.20	4.80	1800	0.619	21.97	0.434	10.85	46.6	
		AB1224LB-Y01	◎ ※ ●	24	0.30	7.20	2100	0.718	25.48	0.659	16.47	48.0	
		AB1224MB-Y01	◎ ※ ●	24	0.39	9.36	2300	0.791	28.09	0.829	20.72	49.0	
		AB1224HB-Y01	◎ ※ ●	24	0.49	11.76	2600	0.881	31.28	0.916	22.90	55.0	
		AB1224UB-Y01	◎ ※ ●	24	0.55	13.20	2800	0.940	33.40	1.148	28.70	53.3	
		AB1224XB-Y01	◎	24	0.71	17.04	3100	1.070	38.00	1.412	35.30	57.0	
		AB1248DB-Y01	◎ ※ ●	48	0.12	5.76	1800	0.619	21.97	0.434	10.85	46.6	
		AB1248LB-Y01	◎ ※ ●	48	0.17	8.16	2100	0.718	25.48	0.659	16.47	48.0	
		AB1248MB-Y01	◎ ※ ●	48	0.20	9.60	2300	0.791	28.09	0.829	20.72	49.0	
		AB1248HB-Y01	◎ ※ ●	48	0.24	11.52	2600	0.881	31.28	0.916	22.90	55.0	
AB1248UB-Y01	◎ ※ ●	48	0.34	16.32	2800	0.940	33.40	1.148	28.70	53.3			

Specifications subject to change without notice.

6600 Park of Commerce Blvd. • Boca Raton, FL 33487 • 561-241-6700 Phone • 561-241-3328 Fax • www.jarothermal.com