




External Dimensions

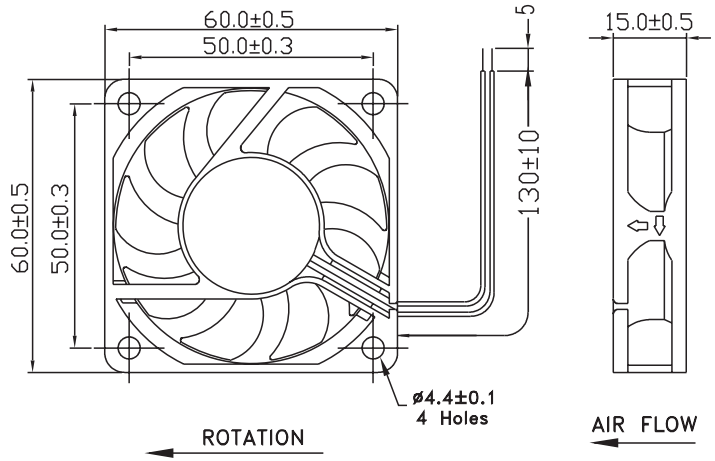

Frame:Plastic(UL:94V-0)  
 Impeller:Plastic(UL:94V-0)  
 Lead wire:UL1007AWG26


Specifications(Nominal)

\*:Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball ※=Sleeve ○=1B1S ●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM)	Maximum AirFlow (CFM)	Maximum Pressure (InAq)	Maximum Pressure (mmAq)	*Noise Level (dB/A)	Weight (g)
60x60x15	AD0612DB-D90(T)	◎ ※ ○ ●	12	0.07	0.84	3100	0.425	15.00	0.065	1.65	23.0	38.0
	AD0612LB-D90(T)	◎ ※ ○ ●	12	0.08	0.96	3500	0.484	17.10	0.085	2.16	27.9	
	AD0612MB-D90(T)	◎ ※ ○ ●	12	0.12	1.44	3900	0.524	18.61	0.102	2.59	30.2	
	AD0612HB-D90(T)	◎ ※ ○ ●	12	0.17	2.04	4500	0.626	22.24	0.141	3.58	32.7	

Specifications subject to change without notice.

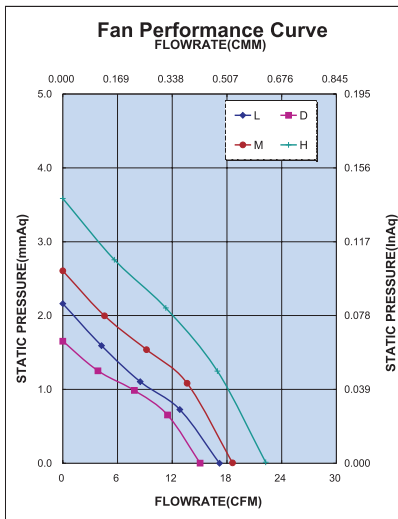

\*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓	✓	✓	✓		✓					

\*Safety approvals

			✓	✓