

Frame: Plastic (UL:94V-0)
 Impeller: Plastic (UL:94V-0)
 Bearing: 1B1S, Hypro bearing
 Lead wire: UL1571AWG28
 VOLTAGE AVAILABLE: 5V, 12V


Specifications (Nominal)

*Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ○=Ball ●=Sleeve ○=1B1S ●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Rated Current (A)	Actual Current (A)	Rated Power (W)	Actual Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM)	Maximum AirFlow (CFM)	Maximum Pressure (InAq)	Maximum Pressure (mmAq)	*Noise Level (dB/A)	Weight (g)
20x20x06	AD2005DX-K70	○●	5	0.06	0.06	0.30	0.30	7000	0.011	0.40	0.022	0.56	12.0	4.0
	AD2005LX-K70	○●	5	0.10	0.07	0.50	0.35	10500	0.012	0.41	0.066	1.68	19.5	
	AD2005MX-K70	○●	5	0.15	0.11	0.75	0.55	14000	0.020	0.70	0.103	2.62	26.9	
	AD2005DX-K71	○●	5	0.06	0.04	0.30	0.20	7000	0.011	0.40	0.022	0.56	12.0	
	AD2005LX-K71	○●	5	0.06	0.06	0.30	0.30	10500	0.012	0.41	0.066	1.68	19.5	
	AD2005MX-K71	○●	5	0.12	0.11	0.60	0.55	14000	0.020	0.70	0.103	2.62	26.9	
	AD2012MX-K70	○●	12	0.09	0.06	1.08	0.72	14000	0.020	0.70	0.103	2.69	26.9	
	AD2012LX-K71	○●	12	0.05	0.04	0.60	0.48	10500	0.012	0.41	0.066	1.68	19.5	
	AD2012MX-K71	○●	12	0.08	0.06	0.96	0.72	14000	0.020	0.70	0.103	2.62	26.9	

Specifications subject to change without notice.

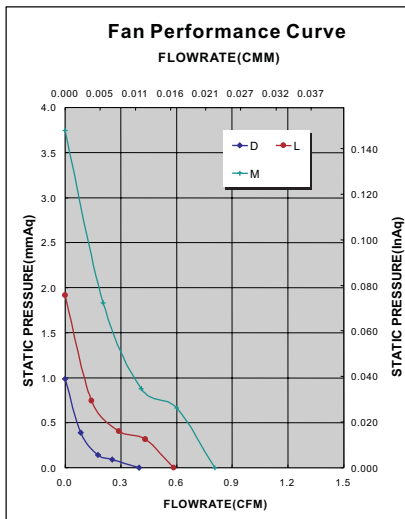

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓	✓		✓							

*Safety approvals

				✓